



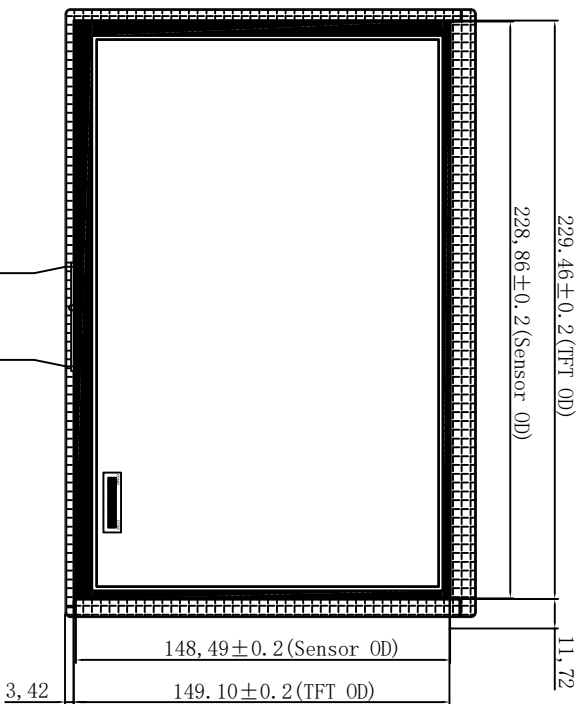
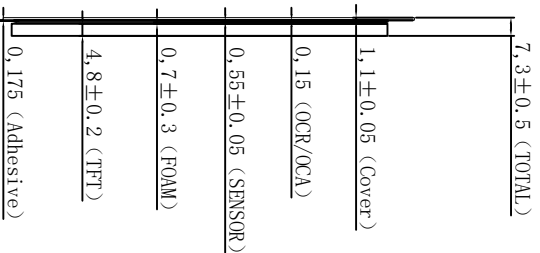


No ROHS hazardous material

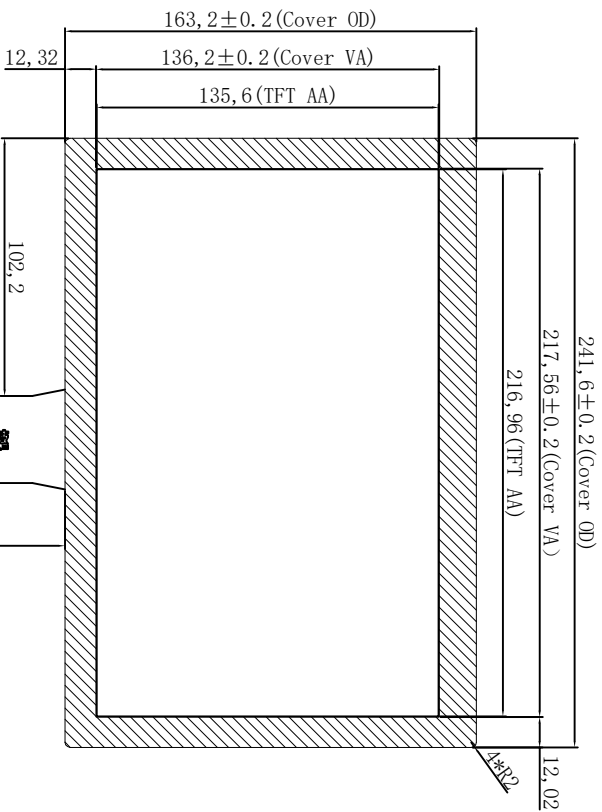

Frame adhesive = 0.175mm (3M9495)

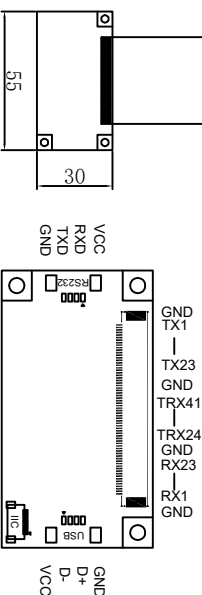

DETAIL "A"  
2:1

Screen printing area: Print Black

Frame adhesive foam area = 0.7mm

1	VCC (5V)
2	DN
3	DP
4	GND

Front view

Side view

Back view

Technical parameters

1. Interfaces:	USB/RS232/ITC	8. Transmittance:	≥85%
2. Structure :	G+G	9. Surface hardness:	≥6H
3. IC solutions:	ILI2511	10. Operate :	-20°C~+70°C, ≤85%RH
4. Impact resistance:	30g/0.01s, Steel ball 1mm / 752g/height, show 1 time	11. Storage :	-30°C~+80°C, ≤85%RH
5. Touch points:	10 points	12. Brightness:	450cd/m <sup>2</sup>
6. Power supply:	5V	13. Viewing angle:	80/80/80/80
7. Immaturity range:	45~85%RH	14. Unmarked dimension tolerance:	as±0.2

TFT (HX1011A01D-40A) PIN:

1	2	3	4	5	6	7	8	9	10	11	12	13	14
Vcom	VDD	VDD	NC	NC	NC	GND	Rxn0-	Rxn0+	GND	Rxn1-	Rxn1+	GND	Rxn2-
15	16	17	18	19	20	21	22	23	24	25	26	27	28
Rxn2+	GND	Rxck-	Rxck+	GND	Rxn3-	Rxn3+	GND	NC	NC	GND	NC	LED-PW+	NC
29	30	31	32	33	34	35	36	37	38	39	40		
AVDD	GND	LED-	LED-	NC	NC	VGL	NC	Cap-EN	VGH	LED+	LED+		



杭州宏毅科技有限公司  
GraHowlet Technology CO., Ltd

Model	HX1011805		view direction		Unit	MM	
Version	V1.0	Designer	LJ00	Date	2018-9-16	Edition	A1
Customer		Approved	HBZ	Date	2018-9-18	Proportion	1:1